



9320/4T – Wireless quadruple pushbutton

1- Safety warning

Warning: Failure to follow the safety guidelines provided below could result in damage to your Wireless Quadruple Pushbutton or other property. Read all safety information below before using the Wireless Button.

- Avoid high humidity or extreme temperatures;
- Avoid prolonged exposure to sunlight or intense UV light;
- Do not drop or do not subject the unit to strong vibrations;
- Do not disassemble or try to repair the unit;
- Do not bring into contact with flammable liquids, gases and other explosive substances.

2 – Welcome

We present your Wireless Button 9320/4T.


This quadruple button is self-powered by a small piezoelectric circuit and allows you to control the actuators of the FEB Easy series without ever having to worry about changing the batteries.

Each of the four pushbuttons can be used independently of each other, or they can be joined, in example to control a curtain actuator.

It is possible to use a single button to control more than one actuator and to use several buttons to control the same actuator.

In this guide you will find an overview of the product and instructions for installation and start-up.

3 - A detailed look at your device

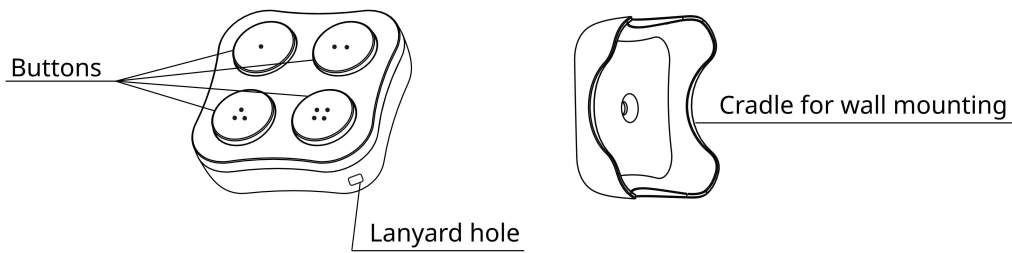


Your wireless pushbutton 9320/4T

- **Pulsanti:** the four independent parts to press to send a signal
- **Lanyard hole:** you can use this hole to attach the button to a lanyard
- **Cradle for wall mounting:** this is a cradle with a magnetic bottom that can be fixed to the wall with a screw or double-sided tape and which provides a convenient place to store the button.

4 - Installation

The 9320/4T piezoelectric button can be installed in three ways:

- Using the mounting hole in the base, as shown in the image below. Use this hole to attach the base to a mounting bracket or directly to a wall.

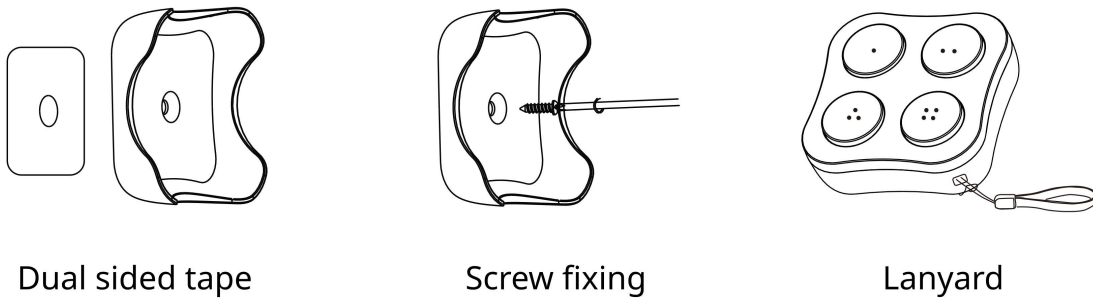

Ways to attach your 9320/4T

- Using the strips of double-sided tape provided in the package, in case you decide to stick it on a surface where you do not want or cannot make fixing holes.
- Using the lanyard included in the box, so you can easily carry the 9320/4T with you.

5 – Start up

- To pair each of the four buttons of the 9320/4T to an actuator, simply press the pairing button of the actuator for about 3 seconds, until the LED indicator starts flashing, at this point press the button of the 9320/4T that you want to pair. Just press once. You will see that the actuator LED will stop flashing, indicating that the two have been paired. It is possible to connect more than one button to the same actuator, up to a maximum of 10 buttons. There are no limits, instead to the number of actuators that can be controlled by the same button, simply repeat the pairing procedure between the button and all the actuators that you want to be controlled by the same button and this applies to each of the 4 buttons of the 9320/4T.
- The 9320/4T module also allows you to control multiple actuators in coordinated mode, so that they all switch on and off together. In this mode the button splits into two halves: the half with buttons 1 and 3 becomes an on/off command and the half with buttons 2 and 4 becomes another on/off command. By pressing button 1, all the actuators to which it is connected in coordinated mode will turn on at the same time and by pressing button 3, those same actuators will turn off and the same thing can be done with the actuators that are connected to the pair 2 and 4. To connect the button to an actuator in coordinated mode, simply press the actuator pairing button for about 3 seconds, until the LED indicator starts flashing, at this point press the selected 9320/4T button quickly for 4 times. At this point the actuator will be connected in coordinated mode either to pair 1-3 or to pair 2-4, depending on the button pressed. It is also possible to make a mixed connection, in which some actuators are connected in coordinated mode and others in normal mode, in this case each actuator will behave according to the way it has been connected.
- To reset a connection between the actuator and the button, press the actuator pairing button for about 12 seconds. When the button is pressed, the LED indicator will first begin to flash, it will remain lit briefly and then go off. When this sequence is complete and the LED is off, the pairing button can be released and the actuator and all the buttons it was paired with will be disconnected.

6 – Technical characteristics

Wireless network: RF 433MHz

Operating distance: Indoor \leq 25m / Outdoor \leq 60 m

Operating temperature: -5 - 50°C

Dimensions: 54.1 x 54.1 x 20.5 mm